




Śrubunek kątowy z uszczelką

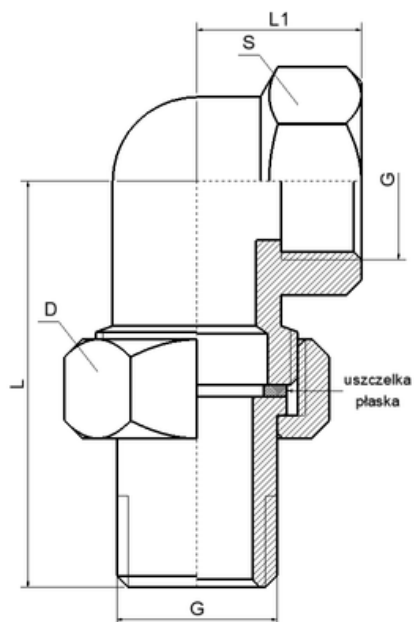

Opis					Opakowanie ilość sztuk		Masa jedn.	EAN	Index
G	L	L1	D	S	woreczek	karton	[g]		
1/2"	53	21,5	30	26	-	100	150	5901797702793	495
3/4"	59	28	37	32	-	50	212	5901797702809	497
1"	70	27	46	39	-	50	360	5901797702816	498
5/4"	80	43	53	47	-	25	514	5901797702823	499

Charakterystyka

Materiał: CW617N

Max ciśnienie robocze: 16 bar

Max temperatura robocza: +110°C

Atesty



Atest Higieniczny B.BK.60110.0264.2024
Narodowego Instytutu Zdrowia Publicznego