




Śrubunek prosty z oringiem

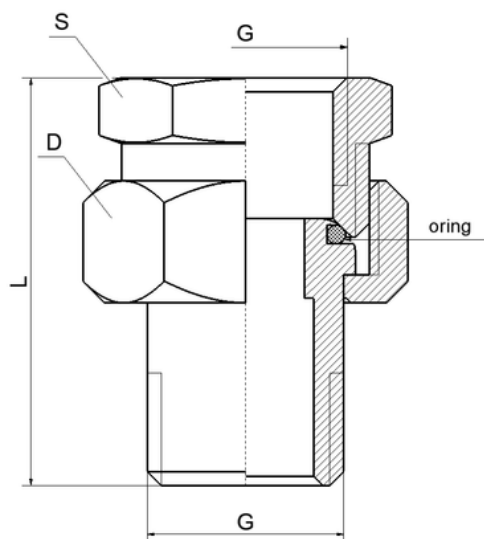

| Opis | | | | Opakowanie ilość sztuk | | Masa jedn. | EAN | Index |
|--------|------|-----|----|------------------------|--------|------------|---------------|-------|
| G | L | D | S | woreczek | karton | [g] | | |
| 3/8" | 34,5 | 24 | 22 | 50 | 250 | 62 | 5901797701888 | 317 |
| 1/2" | 43 | 30 | 27 | - | 200 | 104 | 5901797700027 | 046 |
| 3/4" | 46 | 37 | 34 | - | 100 | 156 | 5901797700041 | 047 |
| 1" | 55,5 | 46 | 38 | - | 50 | 252 | 5901797700065 | 091 |
| 5/4" | 66 | 53 | 48 | - | 50 | 400 | 5901797700089 | 090 |
| 6/4" | 67,5 | 64 | 54 | - | 40 | 532 | 5901797700102 | 094 |
| 2" | 79,5 | 82 | 68 | - | 20 | 1020 | 5901797700126 | 224 |
| 2.1/2" | 88,5 | 96 | 82 | - | - | 1425 | 5901797703042 | 517 |
| 3" | 95 | 107 | 96 | - | - | 1810 | 5901797703165 | 528 |

Charakterystyka

Materiał: CW617N
Max ciśnienie robocze: 16 bar
Max temperatura robocza: +110°C

Atesty



Atest Higieniczny B.BK.60110.0264.2024
 Narodowego Instytutu Zdrowia Publicznego