




Śrubunek prosty z uszczelką

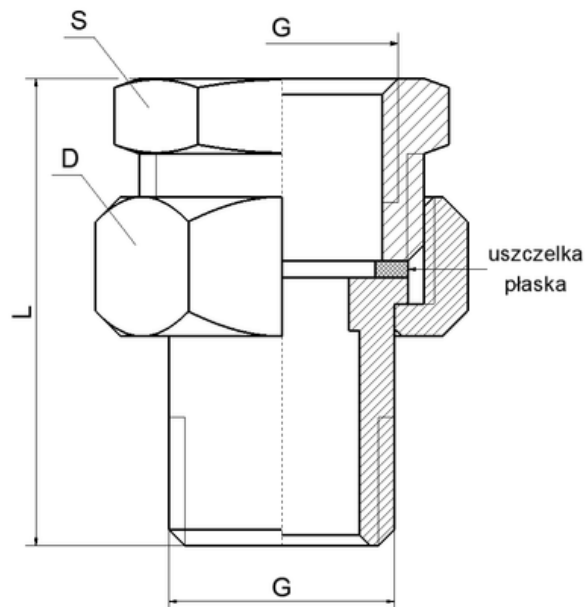

Opis				Opakowanie ilość sztuk		Masa jedn.	EAN	Index
G	L	D	S	woreczek	karton	[g]		
1/2"	43	30	27	-	200	98	5901797702755	494
3/4"	46	37	34	-	100	148	5901797702762	496
1"	55,5	46	38	-	50	238	5901797702779	492
5/4"	66	53	48	-	50	382	5901797702786	493

Charakterystyka

Materiał: CW617N
Max ciśnienie robocze: 16 bar
Max temperatura robocza: +110°C

Atesty



Atest Higieniczny B.BK.60110.0264.2024
 Narodowego Instytutu Zdrowia Publicznego